


# MOB-7150 PUR two component polyurethane

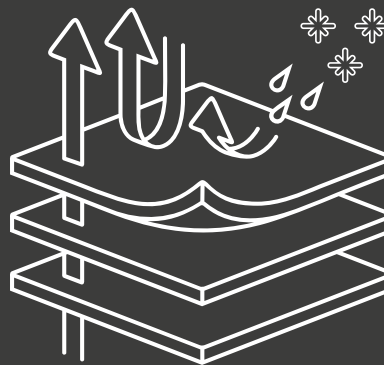

■ MaxTiger Floor Moisture MOB 7150 / PUR It is a one component polyurethane based primer that can be applied on water and moisture resistant, moist or wet concrete surfaces.

## ■ Place of use

- Moist, damp concrete
- Wet or wet concrete, tile, wood, asphalt and asphalt membranes
- Water tanks made of concrete, steel or other materials

## ■ Benefits

- Excellent adhesion to almost any surface

## ■ Features

- It is a two-component material.
- It is resistant to water and moisture and has superior insulation.
- Excellent adhesion to almost any surface.
- Solvent free, can be applied easily in environments without ventilation.
- Cures even at low temperatures and under water films.
- Good resistance to chemicals.
- Resistant to sudden temperature changes (hot to cold).
- Easy to mix. It is ready to use in a short time.
- Provides strong adhesion to the surface.
- Low viscosity and easy to apply.
- A smooth surface is obtained by filling the roughness on the applied surface.



## ■ Technical Specifications

Color	: Clear yellow clear
Density (25°C)	: 1 g / cm <sup>3</sup>
Weight of use	: 4.5
Time of Use (25°C)	: 20-30 Minutes
First Drying (25°C)	: 4 Hours
Final drying time (25°C)	: 24 hours
Hardness (DIN 53505)	: 25-30 (Shore D)
Application Amount (25°C)	: 300-400 gr / m <sup>2</sup>
Application Temperature	: 10-40 °C

## ■ Application

- Surfaces must be cleaned from oil, dirt, dust and waste.
- II. Component I is added to the component.
- Mix until a homogeneous color is obtained.
- The resulting mixture can be applied by roller or brush.
- The prepared mixture should be consumed within ~ 30 minutes.
- Depending on the porosity and absorbency of the surface; 300-400 gr / m<sup>2</sup>.

## ■ Considerations

- Since the pot life is short, it should be mixed in quantity and spread on the surface immediately.
- Never refine the product when priming on wet surfaces or water films
- Unfinished surfaces should be cleaned with thinner within 5-10 minutes.
- In case of eye contact, rinse the eye with plenty of water and seek medical advice immediately.
- It is useful to wear gloves during operation.
- Tools and equipment at the end of use thinner, acetone and so on. should be cleaned with.

